

UŽIVATELSKÝ NÁVOD

Výrobce a dovozce:
IMMAX, Pohoří 703, 742 85 Vřesina, EU | www.immaxneo.cz
Navrženo v České republice, vyrobeno v Číně

IMMAX NEO SMART KONTROLER (L) V4 2-TLAČÍTKOVÝ ZIGBEE 3.0



TECHNICKÉ PARAMETRY:

Protokol: ZigBee 3.0
Frekvence: 2400MHz-2483.5MHz
Maximální RF výstupní výkon: ZigBee:10dBm - max 19dBm
Síťové pohotovostní napájení (Pnet): 0,4W
Příkon: AC 120-240 50 Hz / 60 Hz
Poznámka: bez Nulového vodiče (N)
Rozsah zatížení: 2x 100W pro LED osvětlení
Tepelná pojistka , ochrana proti přehřátí: Ano
Proudová pojistka , ochrana proti přepětí a přetížení: Ano
Komunikační protokol: Zigbee, podpora Tuya
Bezdrátový dosah: 30 m přímá viditelnost, 10 m v zastavěném prostoru
Provozní teplota: -10°C až 40°C
Provozní vlhkost: 20% - 80%
Rozměry: 46 x 46 x 18 mm (bez držáku)
Stupeň krytí: IP20


BEZPEČNOSTNÍ UPOZORNĚNÍ

Nedodržení doporučení může být nebezpečné nebo způsobit porušení zákona. Výrobce, dovozce, distributor anebo prodejce nenese odpovědnost za žádné ztráty nebo poškození v důsledku nedodržení pokynů v této příručce.


1. Nebezpečí úrazu elektrickým proudem. Hlavní jistič nebo pojistka musí být během instalace vypnutá.
2. Instalaci zařízení může provádět pouze elektrikář s licenci.
3. Zařízení umístěte mimo dosah dětí.
4. Zařízení musí být umístěno mimo dosah vody, nadměrné vlhkosti nebo tepla.
5. Neinstalujte zařízení poblíž zdroje silného elektromagnetického záření. Mohlo by dojít k rušení a nesprávné funkčnosti.
6. Zařízení se nepokoušejte opravovat, upravovat či rozebírat. Mohlo by dojít k úrazu elektrickým proudem a k následným škodám na zařízení a majetku.

INSTALACE A SCHÉMA ZAPOJENÍ


Dvoucestné jednoduché ovládání

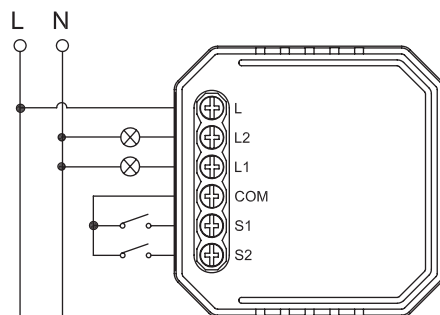

Bez přepínače

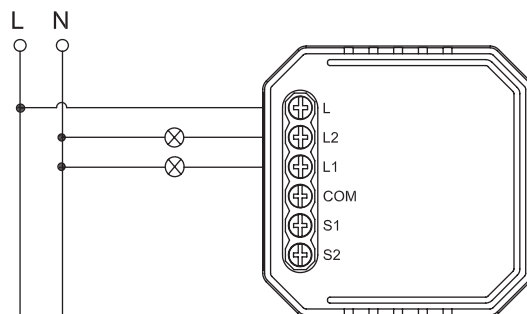


Dvoucestný dvojitý spínač

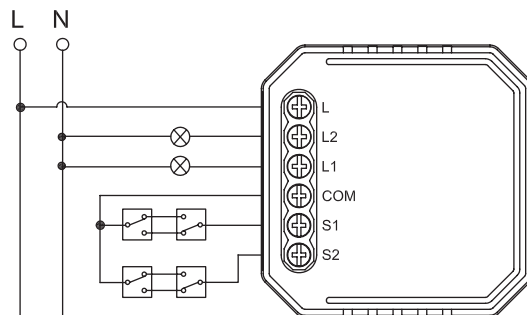

- Před instalací vypněte přívod proudu
- Zapojte vodiče dle schématu
- Vložte modul zpět do elektroinstalační krabice
- Zapněte přívod elektrického proudu a přejděte k instalaci zařízení do aplikace Immax NEO PRO

OVLÁDEJTE SVOU DOMÁCNOST ODKUDKOLIV:

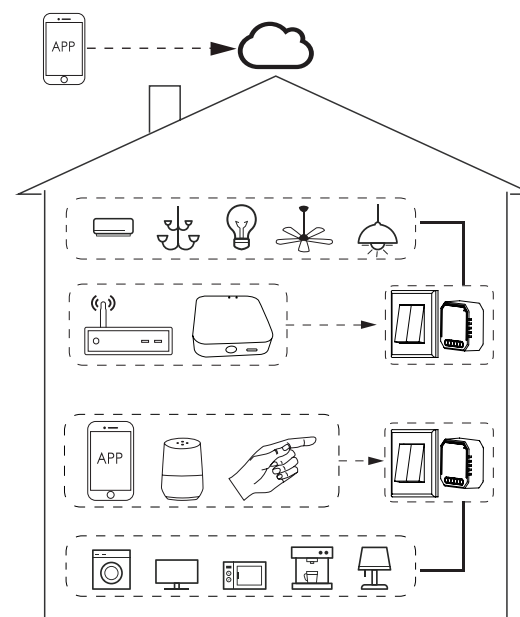

STÁHNUTÍ APLIKACE IMMAX NEO PRO A REGISTRACE

Naskenujte kód QR kód a stáhněte si aplikaci Immax NEO PRO



- Nebo v App Store nebo Google Play vyhledejte a nainstalujte aplikaci Immax NEO PRO.
- Spusťte aplikaci Immax NEO PRO a klepněte na „Registrovat“ a založte si vlastní účet.
- Pokud máte registraci hotovou, přihlaste se pod svůj účet.

PÁROVÁNÍ PRODUKTU DO APLIKACE

Příprava: Ujistěte se, že připojení k internetu má váš mobilní telefon tak i chytrá brána Immax NEO PRO.

Zapněte produkt Immax NEO, LED dioda by měla rychle blikat. Pokud tomu tak není, zařízení vyresetujte. Otevřete aplikaci Immax NEO PRO, klikněte na ikonu „Místnost“. Potom klikněte na ikonu „+“ pro přidání nového zařízení. V levém sloupečku vyberte kategorii Immax NEO. Z nabízených produktů zvolte dané zařízení. Zvolte chytrou bránu, se kterou chcete toto zařízení spárovat (poznámka: toto je nezbytné, pokud máte víc než jednu chytrou bránu

Immax NEO PRO). Klikněte na ikonu „Další krok“. Potvrďte, že LED kontrolka bliká. Klikněte na ikonu „Další krok“. Vyčkejte, až bude zařízení řádně spárované s chytrou bránou Immax NEO PRO. Zadejte název zařízení. Zvolte místnost, ve které chcete mít dané zařízení umístěné. Klikněte na „Dokončeno“.

RESET ZAŘÍZENÍ

- dlouze stiskněte tlačítko na kontroleru na více než 10 vteřin. LED dioda začne rychle blikat, nebo zazní zvukové upozornění - zařízení je vyresetované
- vypněte a zapněte zařízení 5x nástěnným vypínačem. Interval mezi vypnutím a zapnutím by měl být 1-2 vteřiny. Po 5 zapnutí LED dioda začne rychle blikat, nebo zazní zvukové upozornění - zařízení je vyresetované.

BEZPEČNOSTNÍ INFORMACE

UPOZORNĚNÍ: Uchovávejte mimo dosah dětí. Tento výrobek obsahuje malé součástky, které mohou způsobit udušení nebo zranění při požití.

VAROVÁNÍ: Každá baterie má předpoklad k úniku škodlivých chemikálií, které mohou poškodit pokožku, oděv nebo prostor kde je baterie uložena. Abyste předešli riziku zranění, nedovolte aby jakákoliv látka z baterie přišla do kontaktu s očima nebo pokožkou. Každá baterie může prasknout či dokonce explodovat pokud je vystavena ohni nebo jiným formám nadměrného tepla. Během manipulace s bateriemi buďte opatrní. Pro snížení rizika či zranění způsobené nesprávným zacházením s bateriemi proveďte následující opatření:


- Nepoužívejte různé značky a typy baterií ve stejném zařízení
 - Při výměně baterií vždy vyměňte všechny baterie v zařízení
 - Nepoužívejte dobijící nebo opakovaně použitelné baterie.
 - Nedovolte dětem instalovat baterie bez dohledu.
 - Dodržujte pokyny výrobce baterie pro správnou manipulaci a likvidaci baterie.
- UPOZORNĚNÍ: Výrobek a baterie by měly být likvidovány v recyklačním centru. Nevyhazujte s běžným odpadem z domácnosti.
- UPOZORNĚNÍ: Pro zajištění bezpečného používání výrobku je nutné v místě instalace přivést vodiče dle platných předpisů. Instalace musí být provedena pouze osobou s odpovídající certifikací v oboru elektro. Při montáži nebo při zjištění závady, musí být vždy odpojený přívodní kabel ze zásuvky (v případě přímého zapojení je nutné vypnout příslušný jistič). Nesprávná instalace může vést k poškození výrobku a zranění.
- UPOZORNĚNÍ: Neprovádějte demontáž výrobku, možnost úrazu elektrickým proudem.

UPOZORNĚNÍ: Používejte pouze originální napájecí adaptér dodaný s výrobkem. Neuvádějte zařízení do provozu, pokud přívodní kabel vykazuje známky poškození.

UPOZORNĚNÍ: Postupujte podle pokynů v přiloženém manuálu.

ÚDRŽBA

Chraňte zařízení před kontaminací a znečištěním. Přístroj otřete měkkým hadříkem, nepoužívejte drsný nebo hrubozrný materiál.
NEPOUŽÍVEJTE rozpouštědla nebo jiné agresivní čističe či chemikálie.
Na tento výrobek bylo vydáno Prohlášení o shodě, více informací naleznete na www.immax.cz

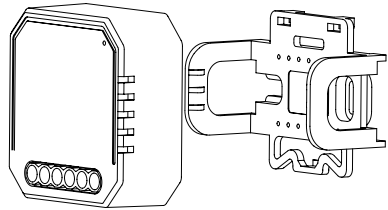

USER MANUAL

Manufacturer and importer:
IMMAX, Pohoří 703, 742 85 Vřesina, EU | www.immaxneo.cz | www.immaxneo.com
Designed in Czech Republic, Made in China



TECHNICAL SPECIFICATIONS:

Protocol: ZigBee 3.0
Frequency: 2400MHz-2483.5MHz
Maximum RF output power: ZigBee:10dBm - max 19dBm
Network standby power (Pnet): 0.4W
Power: AC 120 - 240 50Hz/60Hz
Note: without Zero wire (N)
Load Range: 2x 100W for LED lighting
Thermal fuse, overheat protection: Yes
Current fuse, overvoltage and overload protection: Yes
Communication protocol: Zigbee, Tuya support
Wireless range: 30 m direct visibility, 10 m in built-up area
Operating temperature: -10°C to 40°C
Operating Humidity: 20% to 80%
Dimensions: 46 x 46 x 18 mm (without bracket)
Degree of protection: IP20


SAFETY NOTICE

Failure to follow the recommendations can be dangerous or cause a violation of the law. The manufacturer, importer, distributor and/or dealer will not be liable for any loss or damage resulting from failure to follow the instructions in this manual.


1. Risk of electric shock. The main circuit breaker or fuse must be switched off during installation.
2. Only a licensed electrician may install the equipment.
3. Place the equipment out of the reach of children.
4. The equipment must be located away from water, excessive moisture or heat.
5. Do not install the device near a source of strong electromagnetic radiation. Interference and malfunction could occur.
6. Do not attempt to repair, modify or disassemble the equipment. Electrical shock and consequential damage to equipment and property could result.

INSTALLATION AND WIRING DIAGRAM:


Two Way Single Control

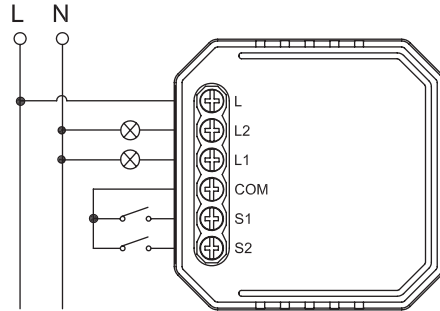

Without Switch

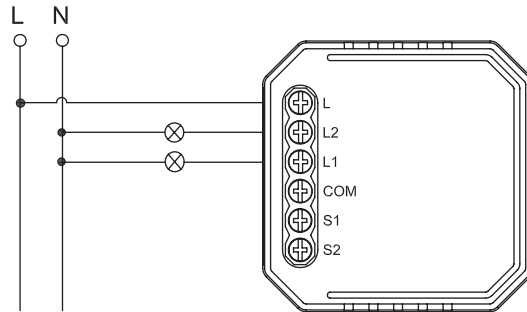


Two Way Double Switch

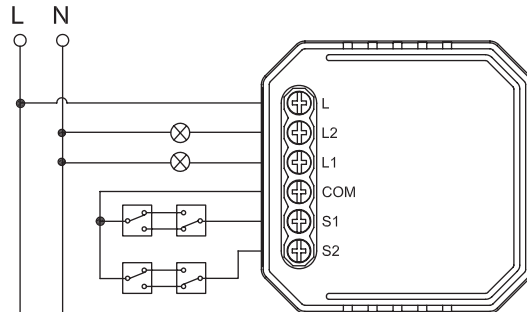

- Switch off the power supply before installation
- Connect the wires according to the diagram
- Insert the module back into the wiring box
- Switch on the power supply and proceed to install the device in Immax NEO PRO

CONTROL YOUR HOME FROM ANYWHERE:

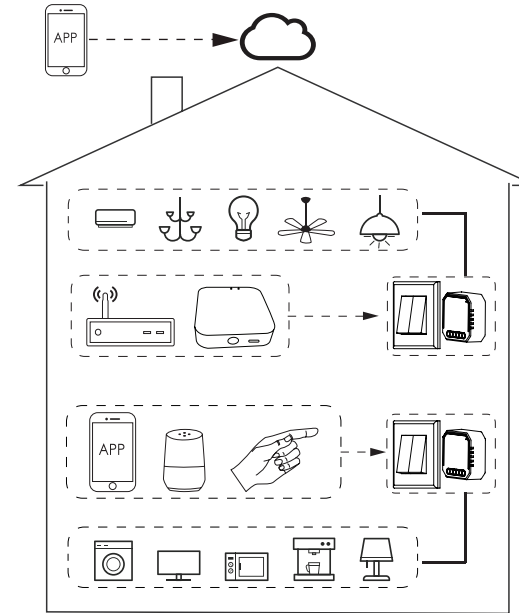

DOWNLOAD IMMAX NEO PRO AND REGISTER

Scan the QR code and download the Immax NEO PRO app.



- Or search for and install the Immax NEO PRO app in the App Store or Google Play.
- Launch the Immax NEO PRO app and tap "Register" to create your own account.
- Once you have completed registration, log in with your account.

PAIRING THE PRODUCT TO THE APPLICATION

Preparation: make sure your mobile phone and the Immax NEO PRO smart gateway are connected to the internet.

Turn on the Immax NEO product, the LED should flash quickly. If not, reset the device. Open the Immax NEO PRO app, click on the "Room" icon. Then click on the "+" icon to add a new device. In the left column, select the Immax NEO category. Select the device from the available products. Select the smart gateway you want to pair this device with (note: this is necessary if you have more than one smart gateway)

Click on the "Next step" icon. Confirm that the LED is flashing. Click on the "Next Step" icon. Wait until the device is properly paired with the Immax NEO PRO smart gateway. Enter the device name. Select the room where you want the device to be located. Click on "Done."

RESET THE DEVICE

- Long press the button on the controller for more than 10 seconds. The LED will flash rapidly or an audible alert will sound - the device is reset
- Switch the device off and on 5 times with the wall switch. The interval between switching off and on should be 1-2 seconds. After 5 power-ups the LED will flash rapidly or an audible alert will sound - the device is reset.

SAFETY INFORMATION

CAUTION: Keep out of reach of children. This product contains small parts, which may cause suffocation or injury if swallowed.

WARNING: Every battery has the potential to leak harmful chemicals that can damage skin, clothing or area where the battery is stored. To avoid the risk of injury, do not allow any substance from the battery to come into contact with the eyes or skin. Every battery may burst or even explode if exposed to fire or other forms of excessive heat. Take care when handling the batteries. To reduce the risk of injury from mishandling the batteries, take the following precautions:

- Do not use different brands and types of batteries in the same device
- When replacing the batteries, always replace all the batteries in the device
- Do not use rechargeable or reusable batteries.
- Do not allow children to insert batteries without supervision.
- Follow the battery manufacturer's instructions for proper battery handling and disposal.

CAUTION: The product and batteries should be disposed of at a recycling centre. Do not dispose of them with normal household waste.

CAUTION: To ensure safe use of the product, wires must be brought at the installation site according to valid regulations. The installation must only be carried out by an individual with the appropriate certification in the field of electronics. During installation or when a fault is detected, the power cable must always be disconnected from the socket (in the case of direct connection, the relevant circuit breaker must be switched off). Improper installation can damage the product and cause injury.

CAUTION: Do not disassemble the product, electric shock may occur.

CAUTION: Use only the original power adapter provided with the product. Do not operate the device if the power cord shows signs of damage. CAUTION: Follow the instructions in the enclosed manual.

MAINTENANCE

Protect the device from contamination and soiling. Wipe the device with a soft cloth, do not use rough or coarse materials.

DO NOT USE solvents or other aggressive cleaners or chemicals.

A Declaration of Conformity has been issued for this product. More information can be found at www.immax.cz